




# 1 rempsyc: Convenience functions for psychology

2 Rémi Thériault  <sup>1</sup>

3 <sup>1</sup> Department of Psychology, Université du Québec à Montréal, Québec, Canada

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright  
and release the work under a  
Creative Commons Attribution 4.0  
International License ([CC BY 4.0](#))

## 4 Summary

5 {rempsyc} is an R package of convenience functions that make the analysis-to-publication  
6 workflow faster, easier, and less error-prone. It enables the creation of publication-ready APA  
7 (American Psychological Association) tables exportable to Word (via {flextable}) and easily  
8 customizable APA-compliant plots (via {ggplot2}). It makes it easy to run statistical tests,  
9 check assumptions, and automate various tasks common in psychology research and social  
10 sciences more broadly.

## 11 Statement of need

12 There are many reasons to use R ([R Core Team, 2022](#)) for analyzing and reporting data from  
13 research studies, such as being compatible with the ideals of open science ([Quintana, 2020](#)).  
14 However, R has a major downside for novices: its steep learning curve due to its programmatic  
15 interface, in contrast to perhaps more user-friendly point-and-click software. Of course, this  
16 flexibility is also a strength, as the R community can and does come together to produce  
17 packages that make using R increasingly easier and more user-friendly (e.g., the *easystats*  
18 ecosystem [Lüdtke et al., 2019/2023](#)). The {rempsyc} package (Really Easy Methods for  
19 Psychology) contributes to this momentum by providing convenience functions that remove as  
20 much friction as possible between your script and your manuscript (in particular, if you are  
21 using Microsoft Word).

22 There are mainly three things that go into a manuscript: text, tables, and figures. {rempsyc}  
23 does not generate publication-ready text summarizing analyses; for this, see the {report}  
24 package ([Makowski et al., 2021/2023](#)). Instead, {rempsyc} focuses on the production of  
25 publication-ready tables and figures. Below, I go over a few quick examples of those.

## 26 Examples Features

### 27 Publication-Ready Tables

28 Many researchers using R still copy-paste the values from the R console to their manuscript, or  
29 retype them manually. Yet, this approach increases the risks of copy-paste and retyping errors  
30 so common in psychology. This problem is not trivial given that according to some estimates,  
31 up to 50% of articles in psychology have at least one statistical error ([Nuijten et al., 2016](#)).  
32 Ideally, one should be able to format the table directly in R, and to export it to Word directly.

33 Formatting a table properly in R is already a tedious and time-consuming task, but fortunately  
34 several packages take care of this step (e.g., the {broom} or {report} packages, [Makowski et al., 2021/2023](#); [Robinson et al., 2022](#), and there are several others). Exporting these formatted  
35 tables to Microsoft Word remains a challenge however. Some packages do export to Word  
36 (e.g., the {apaTables} package [Stanley & Spence, 2018](#)), but their formatting is often rigid  
37 especially when using analyzes or table formats that are not supported by default.  
38

39 {rempsysc} solves this problem by allowing maximum flexibility: you manually create the data  
40 frame exactly the way you want, and then only use the nice\_table() function on the resulting  
41 data frame. nice\_table() works on any data frame, even non-statistical ones like mtcars.

42 One of its main benefits however is the automatic formatting of statistical symbols and its  
43 integration with other packages. We can for example create a {broom} table and then apply  
44 nice\_table() on it. It suits particularly well the pipe workflow.

```
45 library(rempsysc)
46
47 lm(mpg ~ cyl + wt * hp, mtcars) |>
48   broom::tidy(conf.int = TRUE) |>
49   nice_table(broom = "lm")
```

Term	<i>b</i>	<i>SE</i>	<i>t</i>	<i>p</i>	95% CI
(Intercept)	49.49	3.66	13.51	< .001	[41.97, 57.01]
cyl	-0.37	0.51	-0.72	.479	[-1.41, 0.68]
wt	-7.63	1.52	-5.01	< .001	[-10.75, -4.51]
hp	-0.11	0.03	-3.64	.001	[-0.17, -0.05]
wt × hp	0.03	0.01	3.23	.003	[0.01, 0.04]

50  
51 We can do the same with a {report} table.

```
52 stats.table <- lm(mpg ~ cyl + wt * hp, mtcars) |>
53   report::report() |>
54   as.data.frame()
55
56 nice_table(stats.table)
```

Parameter	Fit	$b$	95% CI ( $b$ )	$t$	$df$	$p$	$\beta$	95% CI ( $\beta$ )
(Intercept)		49.49	[41.97, 57.01]	13.51	27	< .001	-0.18	[-0.36, -0.01]
cyl		-0.37	[-1.41, 0.68]	-0.72	27	.479	-0.11	[-0.42, 0.20]
wt		-7.63	[-10.75, -4.51]	-5.01	27	< .001	-0.62	[-0.85, -0.40]
hp		-0.11	[-0.17, -0.05]	-3.64	27	.001	-0.29	[-0.53, -0.04]
wt $\times$ hp		0.03	[0.01, 0.04]	3.23	27	.003	0.29	[0.11, 0.47]
AIC	147.01							
AICc	150.37							
BIC	155.80							
R2	0.89							
R2 (adj.)	0.87							
Sigma	2.17							

57

58 The `{report}` package provides quite comprehensive tables, so one may request an abbreviated  
59 table with the 'short' argument. For convenience, it is also possible to highlight significant  
60 results for better visual discrimination, using the 'highlight' argument.<sup>1</sup> Once satisfied with  
61 the table, we can add a title and note.

```
62 my_table <- nice_table(  
63   stats.table, short = TRUE, highlight = 0.001,  
64   title = c("Table 1", "A Pretty Regression Model"),  
65   note = c("The data was extracted from the 1974 Motor Trend US magazine.",  
66           "Greyed rows represent statistically significant differences, p < .001.")  
67 my_table
```

<sup>1</sup>This argument can be used logically, as 'TRUE' or 'FALSE', but can also be provided with a numeric value representing the cut-off threshold for the  $p$  value

**Table 1**

*A Pretty Regression Model*

Parameter	<i>b</i>	<i>t</i>	<i>df</i>	<i>p</i>	$\beta$	95% CI ( $\beta$ )
<b>(Intercept)</b>	<b>49.49</b>	<b>13.51</b>	<b>27</b>	<b>&lt; .001</b>	<b>-0.18</b>	<b>[-0.36, -0.01]</b>
cyl	-0.37	-0.72	27	.479	-0.11	[-0.42, 0.20]
<b>wt</b>	<b>-7.63</b>	<b>-5.01</b>	<b>27</b>	<b>&lt; .001</b>	<b>-0.62</b>	<b>[-0.85, -0.40]</b>
hp	-0.11	-3.64	27	.001	-0.29	[-0.53, -0.04]
wt $\times$ hp	0.03	3.23	27	.003	0.29	[0.11, 0.47]

*Note.* The data was extracted from the 1974 Motor Trend US magazine.

Greyed rows represent statistically significant differences,  $p < .001$ .

One can then easily save the resulting table to Word with `flextable::save_as_docx()`, specifying the object name and desired path.

```
flextable::save_as_docx(my_table, path = "my_table.docx")
```

Additionally, tables created with `nice_table()` are `{flextable}` objects (Gohel & Skintzos, 2022), and can be modified as such.<sup>2</sup>

## Formattting Results of Analyses

`{rempsyc}` also provides its own set of functions to prepare statistical tables before they can be fed to `nice_table()` and saved to Word.

### *t* tests

```
nice_t_test(data = mtcars,
            response = c("mpg", "disp", "drat"),
            group = "am",
            warning = FALSE) |>
            nice_table()
```

Dependent Variable	<i>t</i>	<i>df</i>	<i>p</i>	<i>d</i>	95% CI
mpg	-3.77	18.33	.001	-1.48	[-2.27, -0.67]
disp	4.20	29.26	< .001	1.45	[0.64, 2.23]
drat	-5.65	27.20	< .001	-2.00	[-2.86, -1.12]

<sup>2</sup>A great resource for this is the `{flextable}` e-book: <https://ardata-fr.github.io/flextable-book/>

#### 84 Contrasts

```
85 nice_contrasts(data = mtcars,  
86               response = c("mpg", "disp"),  
87               group = "cyl",  
88               covariates = "hp") |>  
89   nice_table(highlight = .001)
```

Dependent Variable	Comparison	df	t	p	d	95% CI
mpg	4 - 8	28	3.66	.001	3.59	[2.75, 4.46]
	6 - 8	28	1.29	.207	1.44	[0.78, 2.00]
	4 - 6	28	3.64	.001	2.15	[1.35, 3.06]
disp	4 - 8	28	-6.04	<.001	-4.80	[-5.75, -3.83]
	6 - 8	28	-4.86	<.001	-3.29	[-4.24, -2.25]
	4 - 6	28	-2.70	.012	-1.51	[-2.23, -0.88]

90

#### 91 Regressions

```
92 data <- lapply(mtcars, scale)  
93 model1 <- lm(mpg ~ disp + wt * hp, data)  
94 model2 <- lm(qsec ~ drat + wt * hp, data)  
95 my.models <- list(model1, model2)  
96  
97 nice_lm(my.models) |>  
98   nice_table(highlight = TRUE)
```

Dependent Variable	Predictor	df	$\beta$	t	p	$sr^2$	95% CI
mpg	disp	27	-0.06	-0.35	.728	.00	[0.00, 0.01]
	wt	27	-0.63	-4.39	<.001	.08	[0.00, 0.16]
	hp	27	-0.32	-3.00	.006	.04	[0.00, 0.09]
	wt × hp	27	0.31	3.71	.001	.06	[0.00, 0.12]
qsec	drat	27	-0.03	-0.18	.862	.00	[0.00, 0.01]
	wt	27	0.49	2.37	.025	.07	[0.00, 0.19]
	hp	27	-1.05	-6.92	<.001	.62	[0.40, 0.83]
	wt × hp	27	0.02	0.10	.922	.00	[0.00, 0.00]

99

## 100 Simple Slopes

```
101 nice_lm_slopes(my.models, predictor = "wt", moderator = "hp") |>
102   nice_table()
```

Dependent Variable	Predictor (+/-1 <i>SD</i> )	<i>df</i>	$\beta$	<i>t</i>	<i>p</i>	<i>sr</i> <sup>2</sup>	95% CI
mpg	wt (LOW-hp)	27	-0.94	-5.60	< .001	.13	[0.02, 0.25]
	wt (MEAN-hp)	27	-0.63	-4.39	< .001	.08	[0.00, 0.16]
	wt (HIGH-hp)	27	-0.32	-1.94	.063	.02	[0.00, 0.05]
qsec	wt (LOW-hp)	27	0.47	1.56	.131	.03	[0.00, 0.10]
	wt (MEAN-hp)	27	0.49	2.37	.025	.07	[0.00, 0.19]
	wt (HIGH-hp)	27	0.51	2.41	.023	.07	[0.00, 0.19]

## 104 Correlation Matrices

105 It is also possible to export a colour-coded correlation matrix to Microsoft Excel. The  
 106 `cormatrix_excel()` function has several benefits over conventional approaches. The base R  
 107 `cor()` function for example does not use rounded values and the console is impractical for  
 108 large matrices. One may manually round values and export it to a .csv file, which is an  
 109 improvement but still unsatisfying.

110 The {apaTables} package (Stanley & Spence, 2018) allows exporting the correlation matrix  
 111 to Word in an APA format, and in many cases this already meets the formal requirements of  
 112 APA style. However, the Word format is not suitable for large matrices, as it will often spread  
 113 beyond the document's margin limits.

114 Another approach is to export the matrix to an image, like the {correlation} package does  
 115 (Makowski et al., 2020).<sup>3</sup> For very small matrices, this works extremely well, and the colour is  
 116 an immense help to quickly identify which correlations are strong or weak, positive or negative,  
 117 and significant or non-significant. Again, however, this does not work so well for large matrices  
 118 because labels might overlap or navigating the large figure becomes difficult.

119 When the goal is more exploratory in nature, and one has large matrices, it can be beneficial  
 120 to export them to Excel. {rempsyc} combines the idea of using a coloured correlation matrix  
 121 from the {correlation} package with the idea of exporting to Excel using {openxlsx2} (Barbone  
 122 & Garbuszus, 2023).

123 {rempsyc} also provides some usability improvements, like freezing the first row and column so  
 124 as to be able to easily see which variables correlate with which other variables, regardless of  
 125 how far or deep those variables are located within the matrix.

126 The colour represents the strength of the correlation, whereas the stars represent different  
 127 significance thresholds for the *p* value is.<sup>4</sup> The exact *p* values are provided in a second tab for  
 128 reference purposes, so all information is readily available in just one function call.

```
129 cormatrix_excel(data = infert,
130                 filename = "cormatrix1",
131                 select = c("age", "parity", "induced", "case", "spontaneous",
```

<sup>3</sup>Exporting the correlation matrix to an image through the {correlation} package also requires the {see} package (Lüdtke, Patil, et al., 2021)

<sup>4</sup>For convenience, colours are only used when the corresponding *p* value is at least smaller than .05

132 "stratum", "pooled.stratum"))

	A	B	C	D	E	F	G	H	I
1	Parameter	age	parity	induced	case	spontaneous	stratum	pooled.stratum	
2	age	1.0	.08	-.10	.0	-.08	-.21 ***	-.17 *	
3	parity	.08	1.0	.45 ***	.01	.31 ***	-.31 ***	.12	
4	induced	-.10	.45 ***	1.0	.02	-.27 ***	-.10	.16 *	
5	case	.0	.01	.02	1.0	.36 ***	.0	.0	
6	spontaneous	-.08	.31 ***	-.27 ***	.36 ***	1.0	.06	.21 ***	
7	stratum	-.21 ***	-.31 ***	-.10	.0	.06	1.0	.75 ***	
8	pooled.stratum	-.17 *	.12	.16 *	.0	.21 ***	.75 ***	1.0	
9									

	A	B	C	D	E	F	G	H	I
1	Parameter	age	parity	induced	case	spontaneous	stratum	pooled.stratum	
2	age	.0	.194	.113	.956	.186	.001	.006	
3	parity	.194	.0	.0	.889	.0	.0	.059	
4	induced	.113	.0	.0	.789	.0	.113	.010	
5	case	.956	.889	.789	.0	.0	.952	.939	
6	spontaneous	.186	.0	.0	.0	.0	.341	.001	
7	stratum	.001	.0	.113	.952	.341	.0	.0	
8	pooled.stratum	.006	.059	.010	.939	.001	.0	.0	
9									

## 135 Publication-Ready Figures

136 Preparing figures according to APA style, having them look good, and being able to save  
 137 them in high-resolution with the proper ratios is often challenging. Working with {ggplot2}  
 138 (Wickham, 2016) provides tremendous flexibility, but an unintended consequence is that doing  
 139 even trivial operations can at times be daunting.


140 This is why {rempsyc} setups a few default plot types, ready to be saved to your preferred  
 141 format (.pdf, .tiff, or .png).

## 142 Violin Plots

```

143 nice_violin(data = ToothGrowth,
144             group = "dose",
145             response = "len",
146             xlabels = c("Low", "Medium", "High"),
147             comp1 = 1,
148             comp2 = 3,
149             has.d = TRUE,
150             d.y = 30)

```

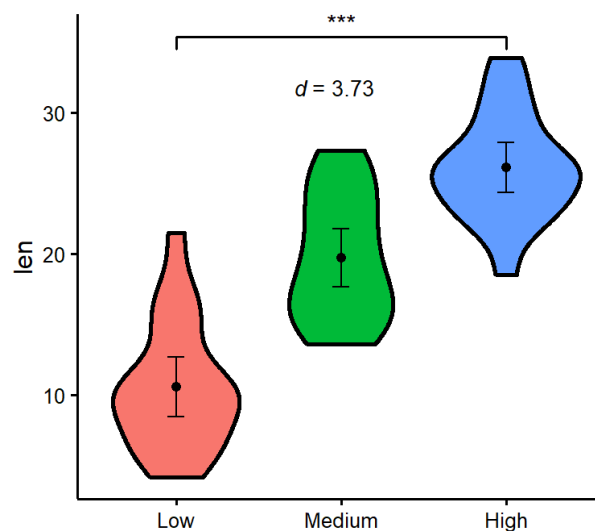

151

152 For an example of such use in publication, see Thériault et al. (2021).

153 One can easily save the resulting figure with `ggplot2::ggsave()`, specifying the desired file  
154 name, extension, and resolution.


```
155 ggplot2::ggsave('nice_violinplotthere.pdf', width = 7, height = 7,  
156                  unit = 'in', dpi = 300)
```

157 Recommended dimensions for saving {rempsyc} figures is 7 inches wide and 7 inches high  
158 at 300 dpi, which makes sure that the resolution is high enough even if saving to non-vector  
159 graphics formats like .png. That said, scalable vector graphics formats like .pdf or .eps are  
160 still recommended for high-resolution submissions to scientific journals.

## 161 Scatter Plots

162 Figures are {ggplot2} objects (Wickham, 2016), and can be modified as such.

```
163 nice_scatter(data = mtcars,  
164              predictor = "wt",  
165              response = "mpg",  
166              group = "cyl",  
167              has.confband = TRUE)
```

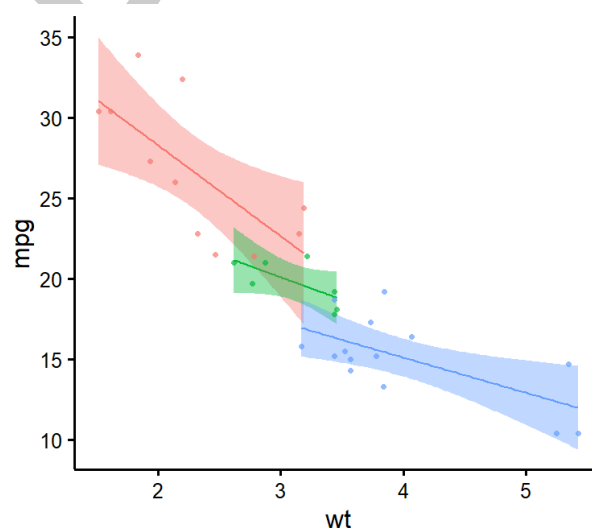


168



```

169 nice_scatter(data = mtcars,
170               predictor = "wt",
171               response = "mpg",
172               has.confband = TRUE,
173               has.r = TRUE,
174               has.p = TRUE) +
175   ggplot2::geom_hline(yintercept = mean(mtcars$mpg), colour = "black",
176                       linewidth = 1.4, linetype = "dashed") +
177   ggplot2::annotate("text", x = 3.5, y = 22, size = 7,
178                      label = paste("Mean mpg =", round(mean(mtcars$mpg), 2)))

```

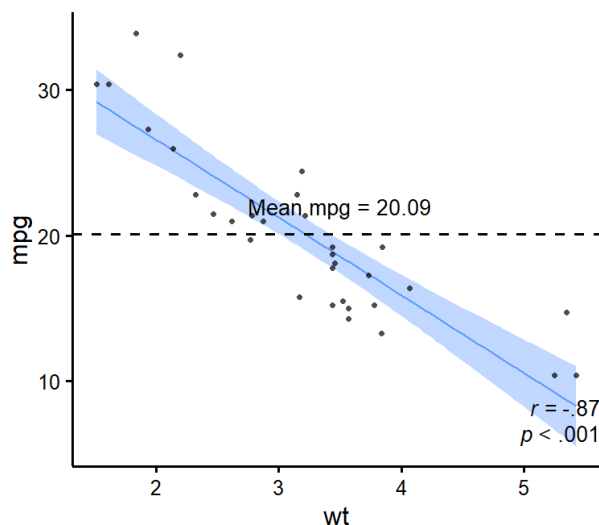

```

179
180 For an example of such use in publication, see Krol et al. (2020).

```


### 181 Overlapping Circles

182 For psychologists using the Inclusion of Other in the the Self Scale (Aron et al., 1992), it can  
 183 be useful to interpolate the original discrete scores (1 to 7) into a group average representation  
 184 of the conceptual self-other overlap. For example, assuming the group mean is 3.5 on the 1 to  
 185 7 scale, `overlap_circle()` will draw a 25% area overlap from interpolation:

```

186 overlap_circle(3.5)

```

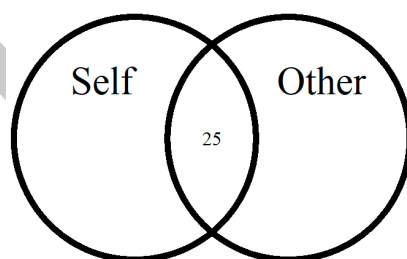

```

187
188 For an example of such use in publication, see Thériault et al. (2021).

```

## 189 Testing assumptions


190 When comes time to test assumptions of a linear model, the best option is the `check_model()`  
191 function from *easystats*' {performance} package, which allows direct visual evaluation of  
192 assumptions (Lüdtke, Ben-Shachar, et al., 2021). Indeed, visual assessment of diagnostic  
193 plots is recommended over statistical tests since they are overpowered in large samples and  
194 underpowered in small samples (Kozak & Piepho, 2018).

195 That said, if for whatever reason one wants to check objective assumption tests for a linear  
196 model, *rempsysc* makes this easy with the `nice_assumptions()` function, which provide  $p$   
197 values for normality (Shapiro–Wilk), homoscedasticity (Breusch–Pagan) and autocorrelation of  
198 residuals (Durbin–Watson) in one call.

## 199 Categorical Predictors

200 `nice_normality()` makes it easy to visually check normality in the case of categorical predictors  
201 (i.e., when using groups), through a combination of quantile-quantile plots, density plots, and  
202 histograms.


```
203 nice_normality(data = iris,  
204               variable = "Sepal.Length",  
205               group = "Species",  
206               shapiro = TRUE,  
207               histogram = TRUE,  
208               title = "Density (Sepal Length)")
```

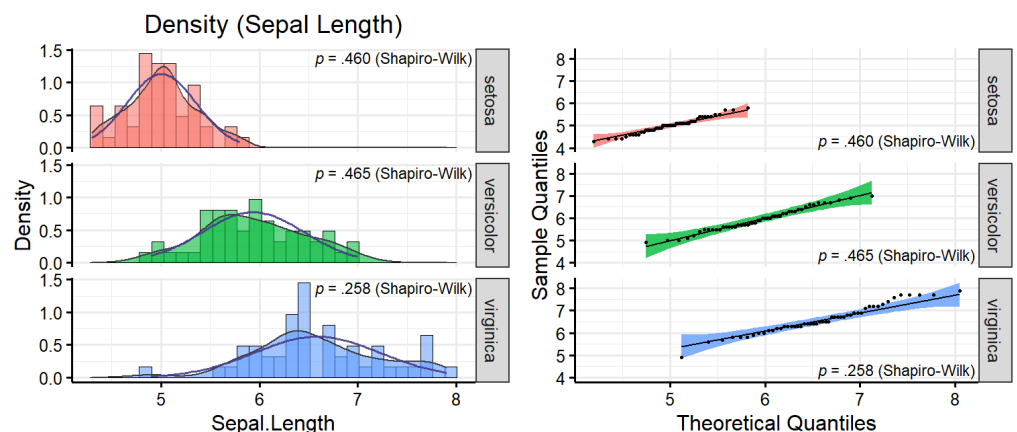

209

210 Similarly for univariate outliers using median absolute deviations from the median (MAD, Leys  
211 et al., 2013).

```
212 plot_outliers(airquality,  
213              group = "Month",  
214              response = "Ozone")
```

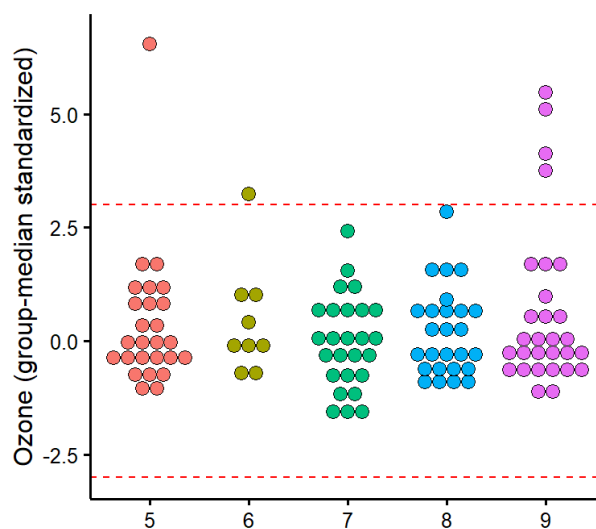

215

216 Univariate outliers based on the median/MAD can also be simply requested with `find_mad()`.<sup>5</sup>

217 `find_mad(airquality, names(airquality), criteria = 3)`

218

219 `## 8 outlier(s) based on 3 median absolute deviations for variable(s):`

220 `## Ozone, Solar.R, Wind, Temp, Month, Day`

221 `##`

222 `## Outliers per variable:`

223 `##`

224 `## $Ozone`

225 `## Row Ozone_mad`

226 `## 1 30 3.218284`

227 `## 2 62 3.989131`

228 `## 3 99 3.488081`

229 `## 4 101 3.025573`

230 `## 5 117 5.261028`

231 `## 6 121 3.333911`

232 `##`

233 `## $Wind`

234 `## Row Wind_mad`

235 `## 1 9 3.049871`

236 `## 2 48 3.225825`

237 Homoscedasticity can also be checked numerically with `nice_var()` or visually with

238 `nice_varplot()`.

239 `nice_var(data = iris,`

240 `variable = names(iris[1:4]),`

241 `group = "Species") |>`


242 `nice_table()`

<sup>5</sup>Once one has identified outliers, it is also possible to winsorize them with the `winsorize_mad()` function.

Species	Setosa	Versicolor	Virginica	Variance.ratio	Criteria	Heteroscedastic
Sepal.Length	0.12	0.27	0.40	3.30	4.00	FALSE
Sepal.Width	0.14	0.10	0.10	1.50	4.00	FALSE
Petal.Length	0.03	0.22	0.30	10.20	4.00	TRUE
Petal.Width	0.01	0.04	0.07	6.80	4.00	TRUE

243

```
244 nice_varplot(data = iris,  
245               variable = "Sepal.Length",  
246               group = "Species")
```

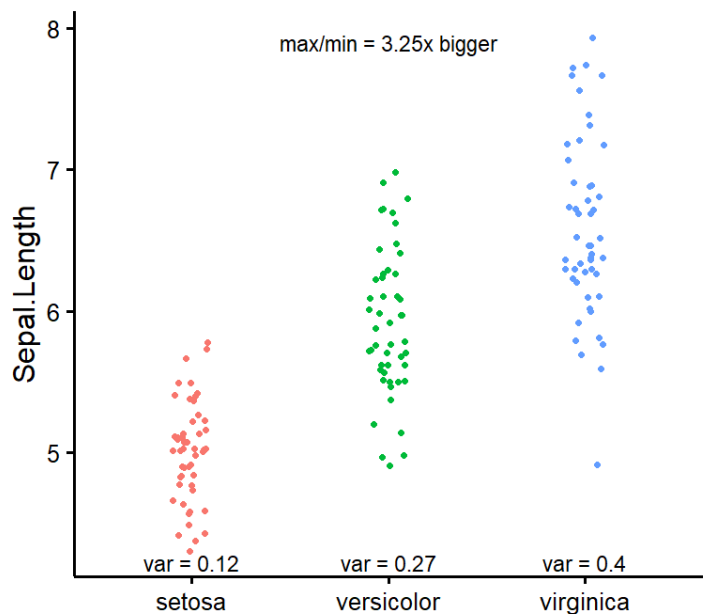

247

## 248 Utility functions

249 Finally, with the idea of making the analysis workflow easier in mind, {rempsyc} also provides  
250 a few other utility functions. nice\_na() allows reporting item-level missing values per scale,  
251 as well as participant's maximum number of missing items by scale, as per recommendations  
252 (Parent, 2013).

253 extract\_duplicates() creates a data frame of only observations with a duplicated ID or  
254 participant number, so they can be investigated more thoroughly. best\_duplicate() allows  
255 to follow-up on this investigation and only keep the "best" duplicate, meaning those with the  
256 fewer number of missing values, and in case of ties, the first one.

257 nice\_reverse() permits the automatic reverse-coding of scores so common for psychology  
258 questionnaires, provided the minimum and maximum score values are known.

259 There are other functions that the reader can explore at their leisure on the package [official](#)  
260 [website](#). However, hopefully, this overview has given the reader a gentle introduction to this  
261 package.

## Licensing and Availability

The `{rempsyc}` package is licensed under the GNU General Public License (GPL v3.0). It is available on CRAN, and can be installed using `install.packages("rempsyc")`. The full tutorial website can be accessed at: <https://rempsyc.remi-theriault.com/>. All code is open-source and hosted on GitHub, and bugs can be reported at <https://github.com/rempsyc/rempsyc/issues/>.

## Acknowledgements

I would like to thank Jay Olson, Hugues Leduc, Björn Büdenbender, and Charles-Étienne Lavoie for statistical or technical advice that helped inform some functions of this package and/or useful feedback on this manuscript. I would also like to acknowledge funding from the Social Sciences and Humanities Research Council of Canada.

## References

- Aron, A., Aron, E. N., & Smollan, D. (1992). Inclusion of Other in the Self Scale and the structure of interpersonal closeness. *Journal of Personality and Social Psychology*, 63(4), 596. <https://doi.org/10.1037/0022-3514.63.4.596>
- Barbone, J. M., & Garbuszus, J. M. (2023). *openxlsx2: Read, write and edit 'xlsx' files*. <https://github.com/JanMarvin/openxlsx2>
- Gohel, D., & Skintzos, P. (2022). *Flextable: Functions for tabular reporting*. <https://CRAN.R-project.org/package=flextable>
- Kozak, M., & Piepho, H.-P. (2018). What's normal anyway? Residual plots are more telling than significance tests when checking ANOVA assumptions. *Journal of Agronomy and Crop Science*, 204(1), 86–98. <https://doi.org/10.1111/jac.12220>
- Krol, S. A., Thériault, R., Olson, J. A., Raz, A., & Bartz, J. A. (2020). Self-concept clarity and the bodily self: Malleability across modalities. *Personality and Social Psychology Bulletin*, 46(5), 808–820. <https://doi.org/10.1177/0146167219879126>
- Leys, C., Ley, C., Klein, O., Bernard, P., & Licata, L. (2013). Detecting outliers: Do not use standard deviation around the mean, use absolute deviation around the median. *Journal of Experimental Social Psychology*, 49(4), 764–766. <https://doi.org/10.1016/j.jesp.2013.03.013>
- Lüdtke, D., Ben-Shachar, M. S., Patil, I., Waggoner, P., & Makowski, D. (2021). performance: An R package for assessment, comparison and testing of statistical models. *Journal of Open Source Software*, 6(60), 3139. <https://doi.org/10.21105/joss.03139>
- Lüdtke, D., Makowski, D., Ben-Shachar, M. S., Patil, I., Wiernik, B. M., Bacher, E., & Thériault, R. (2023). *easystats: An R framework for easy statistical modeling, visualization, and reporting*. <https://easystats.github.io/easystats/> (Original work published 2019)
- Lüdtke, D., Patil, I., Ben-Shachar, M. S., Wiernik, B. M., Waggoner, P., & Makowski, D. (2021). see: An R package for visualizing statistical models. *Journal of Open Source Software*, 6(64), 3393. <https://doi.org/10.21105/joss.03393>
- Makowski, D., Ben-Shachar, M. S., Patil, I., & Lüdtke, D. (2020). Methods and algorithms for correlation analysis in R. *Journal of Open Source Software*, 5(51), 2306. <https://doi.org/10.21105/joss.02306>
- Makowski, D., Lüdtke, D., Patil, I., Thériault, R., Ben-Shachar, M. S., & Wiernik, B. M. (2023). *report: Automated reporting of results and statistical models*. <https://easystats.github.io/report/> (Original work published 2021)

- 305 Nuijten, M. B., Hartgerink, C. H., Van Assen, M. A., Epskamp, S., & Wicherts, J. M. (2016).  
306 The prevalence of statistical reporting errors in psychology (1985–2013). *Behavior Research*  
307 *Methods*, 48, 1205–1226. <https://doi.org/10.3758/s13428-015-0664-2>
- 308 Parent, M. C. (2013). Handling item-level missing data: Simpler is just as good. *The*  
309 *Counseling Psychologist*, 41(4), 568–600. <https://doi.org/10.1177/0011000012445176>
- 310 Quintana, D. S. (2020). *Five things about open and reproducible science that every early*  
311 *career researcher should know*. <https://doi.org/10.17605/OSF.IO/DZTVQ>
- 312 R Core Team. (2022). *R: A language and environment for statistical computing*. R Foundation  
313 for Statistical Computing. <https://www.R-project.org/>
- 314 Robinson, D., Hayes, A., & Couch, S. (2022). *broom: Convert statistical objects into tidy*  
315 *tibbles*. <https://CRAN.R-project.org/package=broom>
- 316 Stanley, D. J., & Spence, J. R. (2018). Reproducible tables in psychology using the apaTables  
317 package. *Advances in Methods and Practices in Psychological Science*, 1(3), 415–431.  
318 <https://doi.org/10.1177/2515245918773743>
- 319 Thériault, R., Olson, J. A., Krol, S. A., & Raz, A. (2021). Body swapping with a Black person  
320 boosts empathy: Using virtual reality to embody another. *Quarterly Journal of Experimental*  
321 *Psychology*, 74(12), 2057–2074. <https://doi.org/10.1177/17470218211024826>
- 322 Wickham, H. (2016). *ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York.  
323 <https://ggplot2.tidyverse.org>